


雅江光電 <small>YAJIANG APPLIED TECHNOLOGIES</small>				图纸编号	RD-AP761-SM-01(ARC-I)	版本号	A
AP761XCET英文说明书				编制日期		2017.08.09	
制作	崔金凤	ARC		审核		批准	
文件名及路径	系统文档夹/部门资料库/技术部/曾宪忠/包装设计/新方案/说明书/arctik/AP761XCET						
新物料编号							
旧物料编号				成品编号	P30333		
通用产品							
备注							F

# AURORA 12Q

## USER MANUAL

arctik® AURORA 12Q  
ARCHITECTURAL TECHNOLOGY AP761

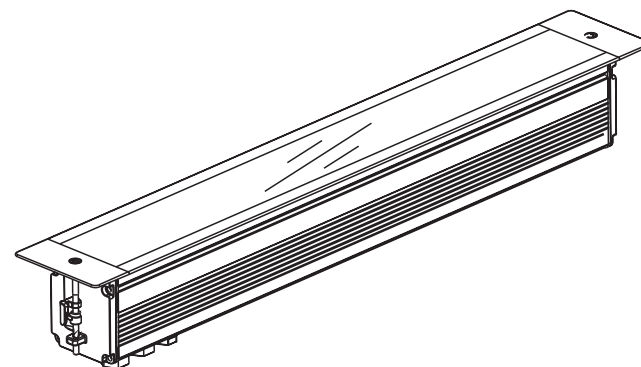

**MODEL:AP761XCET**



广州市雅江光电设备有限公司  
Guangzhou Yajiang Photoelectric Equipment Ltd.  
电话/Tel:020-86947788 邮箱/E-mail:sales@yajiang.cn  
传真/Fax:020-86943773 网址/Website:www.yajiang.cn

— Since 1985 —

RD-AP761-SM-01(ARC-I)

# T ABLE OF CONTENTS

<b>PART 1 PRODUCT SPECIFICATIONS.....</b>	<b>1.</b>
1.1--PRODUCT FEATURES.....	1.
1.2--TECHNICAL SPECIFICATIONS.....	1.
1.3--DIMENSIONS.....	1.
1.4--SAFETY WARNING.....	2.
<b>PART 2 INSTALLATION.....</b>	<b>3.</b>
2.1--MOUNTING.....	3.
2.2--POWER CONNECTIONS.....	4.
2.3--SIGNAL CONNECTIONS.....	4.
<b>PART 3 USING THE DMX CODER.....</b>	<b>5.</b>
3.1--TECHNICAL SPECIFICATIONS.....	5.
3.2--SETTING PARAMETERS.....	5.
3.3--BASIC.....	6.
3.4--MENU.....	6.
3.5--DMX ADDRESS.....	7.
3.6--PERSONALITY.....	7.
3.7--CALIBRATION.....	7.
3.8--DIMMER.....	8.
3.9--STATIC.....	8.
3.10--SETTINGS.....	8.
<b>PART 4 CONTROL WITH A DMX512 CONTROLLER.....</b>	<b>9.</b>
4.1--CHANNEL ASSIGNMENT.....	9-13.

CHANNEL	VALUE	FUNCTION
	0 ↔ 10	NO FUNCTION
	11 ↔ 30	RED100%/GREEN UP/BLUE0%
	31 ↔ 50	RED DOWN/GREEN100%/BLUE0%
	51 ↔ 70	RED0%/GREEN 100%/BLUE UP
	71 ↔ 90	RED0%/GREEN DOWN/BLUE 100%
	91 ↔ 110	RED UP/GREEN 0%/BLUE 100%
	111 ↔ 130	RED100%/GREEN 0%/BLUE DOWN
	131 ↔ 150	RED100%/GREEN UP/BLUE UP
	151 ↔ 170	RED DOWN/GREEN DOWN/BLUE 100%
	171 ↔ 200	RED100%/GREEN 100%/BLUE 100%/WHITE 100%
6	201 ↔ 205	WHITE1: 3200K
	206 ↔ 210	WHITE2: 3400K
	211 ↔ 215	WHITE3: 4200K
	216 ↔ 220	WHITE4: 4900K
	221 ↔ 225	WHITE5: 5600K
	226 ↔ 230	WHITE6: 5900K
	231 ↔ 235	WHITE7: 6500K
	236 ↔ 240	WHITE8: 7200K
	241 ↔ 245	WHITE9: 8000K
	246 ↔ 250	WHITE10: 8500K
	251 ↔ 255	WHITE11: 10000K
7	0 ↔ 9	NO FUNCTION
	10 ↔ 255	STROBE FROM SLOW TO FAST
8	0 ↔ 9	DIMMING SPEED
	10 ↔ 29	OFF (Dimmer speed off)
	30 ↔ 69	DIM1(Speed 1, the fastest)
	70 ↔ 129	DIM2(Speed 2)
	130 ↔ 189	DIM3(Speed 3)
	190 ↔ 255	DIM4(Speed 4 ,the slowest)

SPECIAL1

CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	MASTER DIMMER
2	0 ↔ 9	NO FUNCTION
	10 ↔ 255	STROBE FROM SLOW TO FAST
3	0 ↔ 255	MODULE1 RED
4	0 ↔ 255	MODULE1 GREEN
5	0 ↔ 255	MODULE1 BLUE
6	0 ↔ 255	MODULE1 WHITE
7	0 ↔ 255	MODULE2 RED
8	0 ↔ 255	MODULE2 GREEN
9	0 ↔ 255	MODULE2 BLUE
10	0 ↔ 255	MODULE2 WHITE
11	0 ↔ 9	DIMMING SPEED
	10 ↔ 29	OFF (Dimmer speed off)
	30 ↔ 69	DIM1(Speed 1, the fastest)
	70 ↔ 129	DIM2(Speed 2)
	130 ↔ 189	DIM3(Speed 3)
	190 ↔ 255	DIM4(Speed 4 ,the slowest)

SPECIAL2

CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	MASTER DIMMER
2	0 ↔ 255	RED
3	0 ↔ 255	GREEN
4	0 ↔ 255	BLUE
5	0 ↔ 255	WHITE

# 1 PRODUCT SPECIFICATIONS


## 1.1 PRODUCT FEATURES

- ◆ Setting:DMX Coder(AM-700)
- ◆ Operation:DMX512/Static Play/Wireless
- ◆ Function:RGB 0-100%dimming;Linear/Nonlinear dimming;RGB Calibration
- ◆ Installation:Inground/inwall
- ◆ Power:3 core in
- ◆ Data:5 core in/ out cable
- ◆ Support RDM model control

## 1.2 TECHNICAL SPECIFICATIONS

Model	Voltage	IP	Operation Temperature	Weight	Dimensions	Power	LED Qty
AP761XCET	100V-240V~ 50/60Hz	IP67	Startup: -20~45 operating: -40~45	3.5	660X128X96	43	4in1RGBWX12PCS

## 1.3 DIMENSIONS

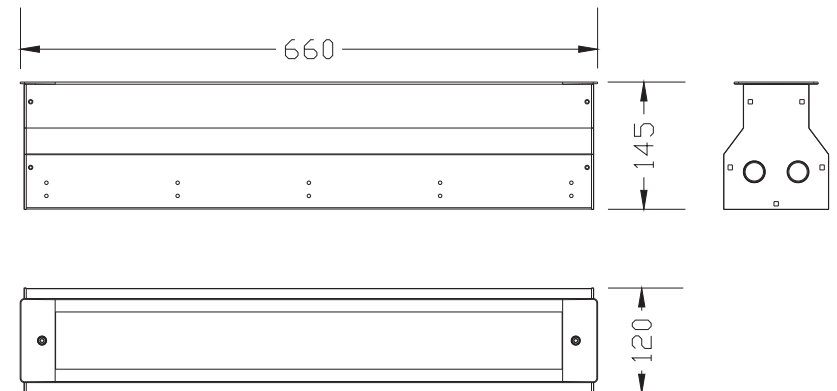

## 1.4 SAFETY WARNING

### **IMPORTANT**

**[ALWAYS READ THE USER MANUAL BEFORE OPERATION. ]  
[PLEASE CONFIRM THAT THE POWER SUPPLY STATED ON THE  
PRODUCT IS THE SAME AS THE MAINS POWER SUPPLY IN YOUR  
AREA.]**

- This product must be installed by a qualified professional.
- Always operate the equipment as described in the user manual.
- A minimum distance of 0.5m must be maintained between the equipment and combustible surface.
- The product must always be placed in a well ventilated area.
- Always make sure that the equipment is installed securely.
- DO NOT stand close to the equipment and stare directly into the LED light source.
- Always disconnect the power supply before attempting and maintenance.
- Always make sure that the supporting structure is solid and can support the combined weight of the products.
- The earth wire must always be connected to the ground.
- Do not touch the power cables if your hands are wet.

### **ATTENTION**



- This product left the place of manufacture in perfect condition. In order to maintain this condition and for safe operation, the user must always follow the instructions and safety warnings described in this user manual.
- Avoid shaking or strong impacts to any part of the equipment.
- Make sure that all parts of the equipment are kept clean and free of dust.
- Always make sure that the power connections are connected correct and secure.
- If there is any malfunction of the equipment, contact your distributor immediately.
- When transferring the product, it is advisable to use the original packaging in which the product left the factory.
- Shields, lenses or ultraviolet screens shall be changed if they have become damaged to such an extent that their effectiveness is impaired.
- The lamp (LED) shall be changed if it has become damaged or thermally deformed.



Caution, risk of electric shock  
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

CHANNEL	VALUE	FUNCTION	
5	31↔50	RED DOWN/GREEN 100%/BLUE 0%	
	51↔70	RED 0%/GREEN100%/BLUE UP	
	71↔90	RED 0%/GREENDOWN/BLUE 100%	
	91↔110	RED UP/GREEN 0%/BLUE 100%	
	111↔130	RED 100%/GREEN 0%/BLUE DOWN	
	131↔150	RED 100%/GREEN UP/BLUE UP	
	151↔170	RED DOWN/GREEN DOWN/BLUE 100%	
	171↔200	RED100%/GREEN100%/BLUE100%/WHITE100%	
	201↔205	WHITE 1: 3200K	
	206↔210	WHITE 2: 3400K	
	211↔215	WHITE 3: 4200K	
6	216↔220	WHITE 4: 4900K	
	221↔225	WHITE 5: 5600K	
	226↔230	WHITE 6: 5900K	
	231↔235	WHITE 7: 6500K	
	236↔240	WHITE 8: 7200K	
	241↔245	WHITE 9: 8000K	
	246↔250	WHITE 10: 8500K	
	251↔255	WHITE 11: 10000K	
	6	0↔9	NO FUNCTION
		10↔255	STROBE FROM SLOW TO FAST
7	0↔9	DIMMING SPEED	
	10↔29	OFF (Dimmer speed off)	
	30↔69	DIM1(Speed 1, the fastest)	
	70↔129	DIM2(Speed 2)	
	130↔189	DIM3(Speed 3)	
190↔255	DIM4(Speed 4 ,the slowest)		

ARC2

CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	RED
2	0 ↔ 255	GREEN
3	0 ↔ 255	BLUE
4	0 ↔ 255	WHITE

ARC2+D

CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	MASTER DIMMER
2	0 ↔ 255	RED
3	0 ↔ 255	GREEN
4	0 ↔ 255	BLUE
5	0 ↔ 255	WHITE

SOLID

CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	CONTRACT ALL LED


ARC FULL

CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	MASTER DIMMER
2	0 ↔ 255	RED
3	0 ↔ 255	GREEN
4	0 ↔ 255	BLUE
5	0 ↔ 10	NO FUNCTION
	11 ↔ 30	RED 100%/GREEN UP/BLUE 0%





## 2 INSTALLATION

### 2.1 MOUNTING

- Embed the outer casing first before installing the fixture.




**NOTE:** The stainless steel cover should not exceed the ground..

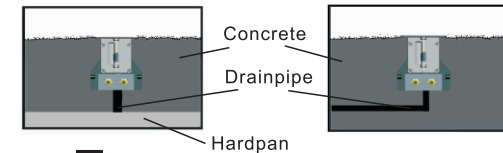


**1000kg**

The fittings have been designed and tested to withstand a static load of 1000kg (based on the outer casing) for installation exclusively in pedestrian or bicycle areas.



**Water resistance and drainage:**

The inground fixture has an ingress protection rating of Ip67. This means that fixture can withstand immersion for 30 minutes and low-pressure water jets. However, it is not designed to withstand constant immersion. Immersion will encourage condensation inside the fixture: a valve in the base of the fixture equalizes pressure as the fixture heats up and cools down. The valve allows air into the fixture but prevents the entry of water. If this valve is under water while the fixture cools down, it will not be able to equalize the pressure in the fixture and humidity may be drawn past seals and into the fixture by suction. The following precautions apply:





- The base of the inground must not be submerged in water other than for very short periods. If in doubt about a particular site, consult a geotechnical engineer.

- It must be possible for water from rain, melting snow, flooding or other sources to drain out of the installation well or sleeve at least as fast as it can enter it.

## 2.2 POWER CONNECTIONS



The input wires of this product must tri-core ,as following :

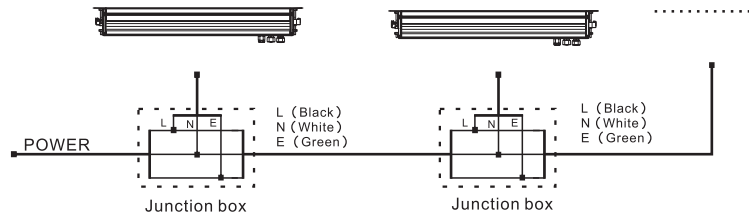

## 2.3 SIGNAL CONNECTIONS

It is advised for greater stability that if over 20 units to be connected, or the total signal cable length is over 60 meters, a DMX signal amplifier should be used.

**Pins and Functions:**

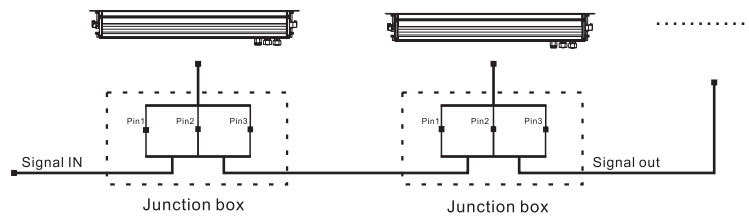

Pins	Functions
Pin1	Gnd/0
Pin2 (black)	Data input (-)
Pin3 (white)	Data input (+)
Pin4 (green)	Data Output (-)
Pin5 (red)	Data Output (+)

# 4 CONTROL WITH A DMX512 CONTROLLER

## 4.1 CHANNEL ASSIGNMENT

- Note: This product has eight DMX512 channel configurations: **【ARC1】** , **【ARC1+D】** , **【ARC2】** , **【ARC2+D】** , **【SOLID】** , **【ARC FULL】** , **【SPECIAL1】** and **【SPECIAL2】** .


### ARC1

CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	RED
2	0 ↔ 255	GREEN
3	0 ↔ 255	BLUE

### ARC1+D


CHANNEL	VALUE	FUNCTION
1	0 ↔ 255	MASTER DIMMER
2	0 ↔ 255	RED
3	0 ↔ 255	GREEN
4	0 ↔ 255	BLUE

### 3.8 DIMMER




- Enter the **【DIMMER】** to select the dimmer work mode, press **【Enter】**
- When Dimmer is set to **【OFF】** the RGB and Master Dimmer are linear,
- When selecting **【DIM1】** , **【DIM2】** , **【DIM3】** or **【DIM4】** ,the RGB and Master Dimmer are nonlinear
- These 4 dimming modes have different soft and smooth dimming effects from fast to slow

### 3.9 STATIC

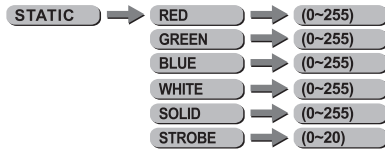

- Enter the **【STATIC】** mode to create the programs
- Combine **【RED】** , **【GREEN】** , **【BLUE】** , **【WHITE】** , **【SOLID】** to create an infinite range of colors
- Set value of the **【STROBE】** , **【0-20Hz】**
- The static setting will be valid when the fixture is powered again

### 3.10 SETTINGS

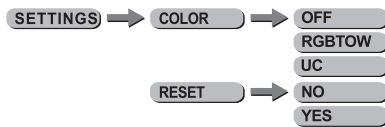

- When **【RGB TOW】** is set to **【YES】** , the color is perfect white as the actual RGB values are adjusted to make white. When it is set to **【OFF】** , the RGB values are not adjusted and the output is most powerful. The **【RGB TOW】** parameter can be adjusted in **【CALIB】** . **【UC】** Function can be compatible with the older version **【RGB】** to make color consistency.
- Enter the **【RESET】** , pass **【YES】** to create all settings to the original factory setting.


## 3 USING THE DMX CODER

### 3.1 TECHNICAL SPECIFICATIONS

- Battery : 2 x 1.5V AA
- Weight : 0.2kg
- Dimensions : 110x70x28mm

### 3.2 SETTING PARAMETERS


- Connect the DMX Coder to the units in series
- Set corresponding DMX address, Personality, Calibration and Dimmer of fixtures through the DMX Coder
- A maximum of 20 units in series can be set by the DMX Coder at the same time
- All connected units will be set with the same information

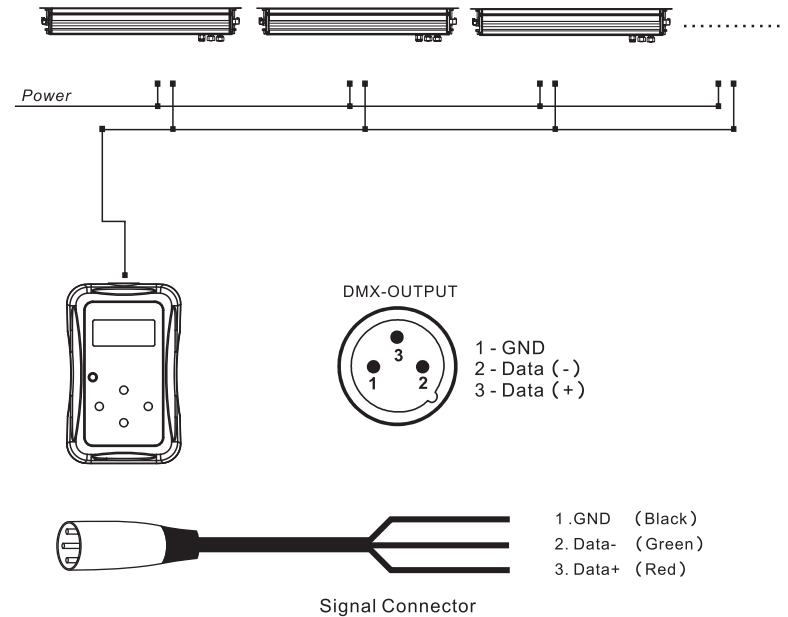




### 3.3 OPERATION

- 【 POWER】 Power on
- 【 MENU】 Scroll through the main menu or exit from the current sub-menu (press and hold to turn off power)
- 【 ENTER】 Enter the currently selected menu or confirm the current function value
- 【 DOWN】 Scroll 'DOWN' through the menu list or decrease the value of the current function
- 【 UP】 Scroll 'UP' through the menu list or increase the value of the current function



### 3.4 MENU

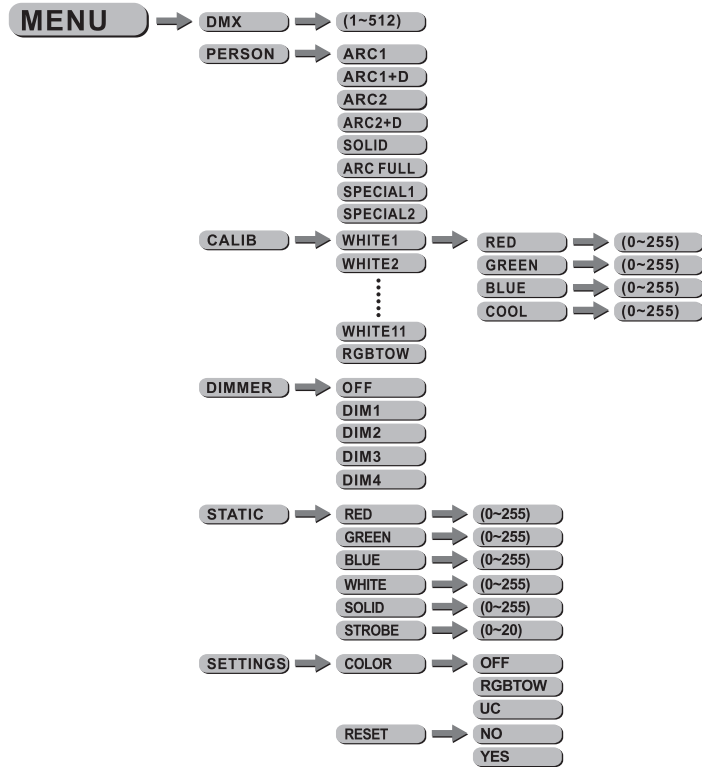


### 3.5 DMX ADDRESS




- Enter the 【DMX】 mode to set the DMX address, press 【Enter】
- On successful setting, the fixtures will display Green and turn off after ten seconds
- If an error occurs when setting, the fixtures will display Red or no response

### 3.6 PERSONALITY



- Enter 【PERSON】 and select 【ARC 1】 / 【ARC1+D】 / 【ARC 2】 / 【ARC2+D】 / 【SOLID】 / 【ARC FULL】 / 【SPECIAL1】 and 【SPECIAL2】 mode, press 【Enter】
- When selecting the others and the fixture is under the DMX work mode.
- Please select corresponding working mode according to the requested fixture.

### 3.7 CALIBRATION

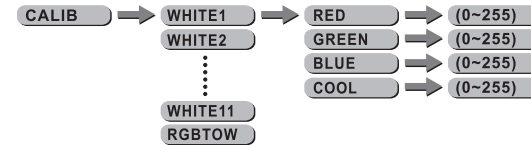

- Enter the 【CALIB】 to select white colors of different color temperature
- There are 11 pre-programed white colors plus RGB and can be edited by using 【Red】 , 【Green】 , 【Blue】 , 【Cool】 ,press 【Enter】 to set the values
- while working under 【ARC FULL】 , 【WHITE1-11】 means the different color temperature white 1 to white 9 of CH5.
- Select 【RGB TOW】 to set the ratio of 【Red】 , 【Green】 ,and 【Blue】 on DMX channels, achieving different white colors