

SOLAR ze/SOLAR-2ze/ETZ MK4

SS345XCE/XCET

SS345XCEM



PRODUCT INTRODUCTION

SOLAR ze/ETZ MK4 with the successes of the 1st Generation, we upgrade it with more efficiency led resource, brightness is 15% higher than the G1,with 8°-40° Electronic zoom system canbe controlled smooth and accurate. SOLAR ze/ETZ MK4 use 4 in 1 led, more than 1600lx. SOLAR ze/ETZ MK4 is design for the artisticper-
formance, theater, stage entertainment.



SS345XCE/XCET



SS345XCEM



PRODUCT PARAMETERS

Optical system

Light source 7x20W (RGBW)
Angle 8°-40°

Appearance

Size 334x191x236mm (SS345XCEM)
355x191x236mm (SS345XCE indoor)
325x283x236mm (SS345XCET outdoor)
Weight 6.6kg
Casing Die-cast aluminum
Color Black

Electrical Specs

Voltage 100-240VAC,50/60Hz
Max. Power 128W
Power Connection Power in and out
DMX XLR DMX in and out

Control System

Dimmer 0-100%16Bit
Cooling Direct Convection
Control DMX512, RDM

Display On board Control,0-20Hz Strobe, Custom Mode
Con Personality HSIC(8CHS)、SSP(8CHS)、TOUR (12CHS)、TR16(17CHS)

Certification


CE, MET

Work Environment




Ambient Temp -20°C-45°C
IP Rated IP65 (SS345XCEM), SS345XCE-Dry Location,
SS345XCET-Dry/Damp/Wet Location/IP66 (with LED display cover installed)

ILLUMINANCE AT DISTANCE


SS345XCEM

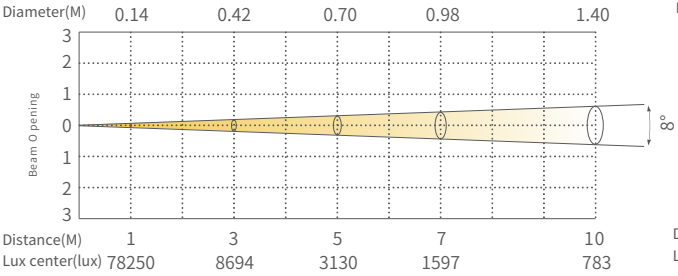


SS345XCE/XCET

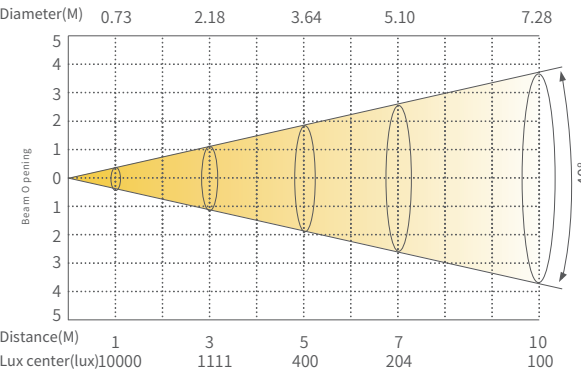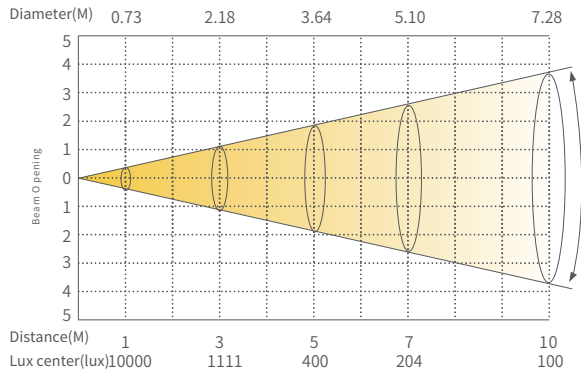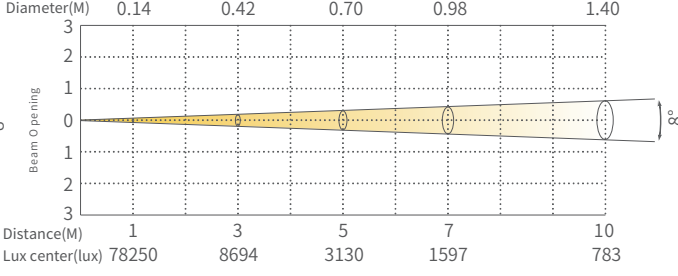

DIMENSIONS

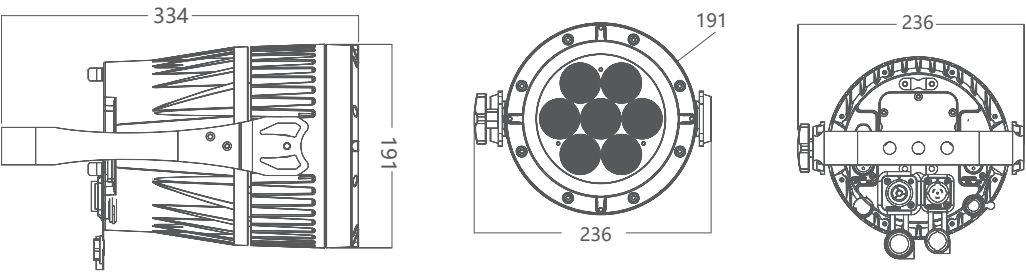

ACCESSORIES(Accessories not included unless otherwise stated)

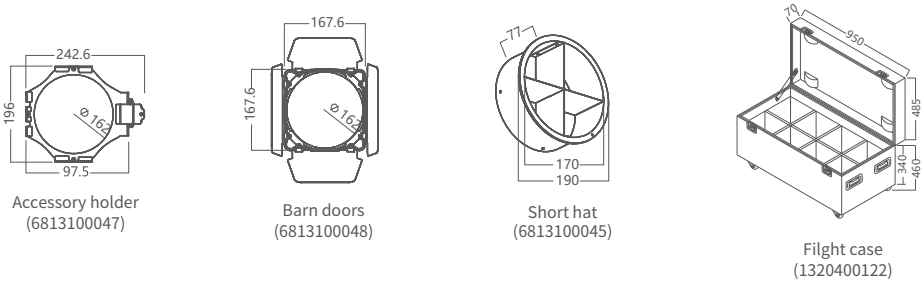

TOURZ

PAR LIGHT