

PLUTO 350

SS659SC



PRODUCT INTRODUCTION

PLUTO 350 is a professional LED spot moving ahead with 5° -35° Electronic zoom system. The luminance at 5 meter is 42000lx. It is a kind of final version stage light, accurate and efficient motor can provide not only large pan angle and tilt angles but also with smooth and high speed. PLUTO 350 with CMY system, zoom, focus, prism, color wheel, rotation gobo wheel, iris, frost can supply high-quality beam colors and gobos. PLUTO 350 is design for the cultural center, function hall, banquet hall, rental performance market.

PRODUCT PARAMETERS

Optical system

Light source 350W module
Angle 5°-35°

Appearance

Size 359x249x596mm
Weight 18.5kg
Casing Flame-retardant plastic (V0)
Color Black

Electrical Specs

Voltage 100-240VAC, 50/60Hz
Max. Power 450W
Power Connection Power in and out
Signal socket 3pin and 5pin in and out, RJ45 in and out

Control System

Pan/Tilt rotation 540°/270°(8-16bit)
Dimmer 0-100%16Bit
Cooling Forced Convection
Control DMX512,RDM,ARTNET, W-DMX (optional)

Display On board Control, Custom Mode,0-25Hz Strobe
Con Personality STANDARD/25CHS. BASIC/22CHS
Special Pan/Tilt movement blackout, User-selectable pan/tilt ranges

Effect synthetic system

Rotating Gobo 8 Gobos+White, Gobo-flow effect, Gobo shake, Bi-directional rotation
Static Gobo 12 Gobos+White, Gobo-flow effect, Gobo shake
Colors One color wheel(8dichroic-filters+White, Rainbow-flow effect)
CMYK CMY wheel, Linear CTO function
Prism One piece of 4 prism

Iris 5-100% linearly adjustable with macro
Focus Motorized linear focus
Frost 1 Frost filter


Certification

CE, MET


Work Environment

Ambient Temp 0-45°C
IP Rated IP20

ILLUMINANCE AT DISTANCE

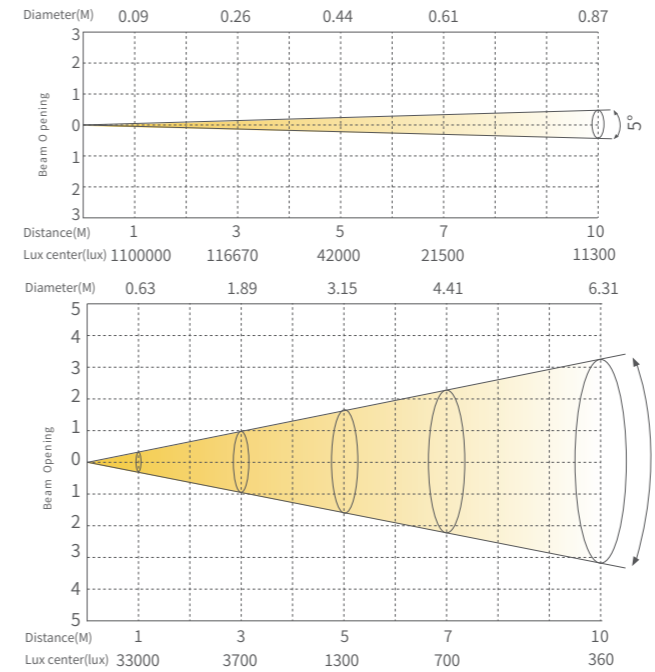

FIXED GOBO

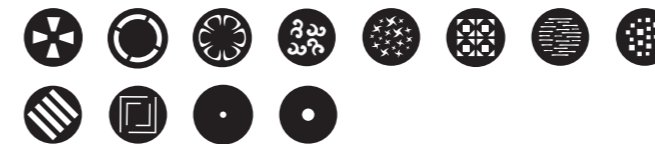

Color




Rotation Gobo




CMY+CTO



DIMENSIONS

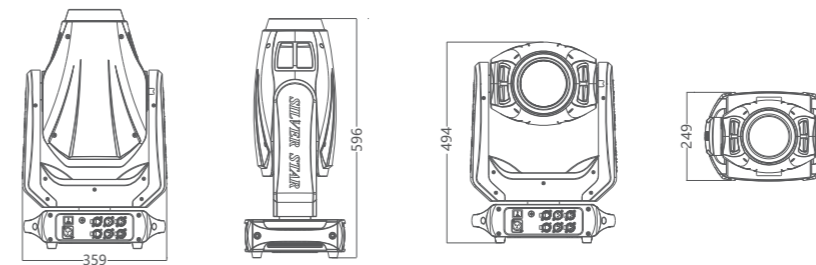

ACCESSORIES (Accessories not included unless otherwise stated)

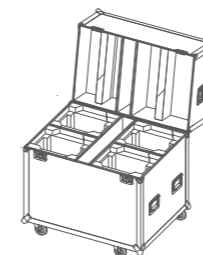

Flight Case
(1320400177)

Wireless receiver Kit
(2440010465)