

PLUTO 250

SS662SC



PRODUCT INTRODUCTION

PLUTO 250 Medium-sized professional LED hybrid moving ahead with 3-35° Electronic zoom system. It is a kind of final version stage light, accurate and efficient motor can provide not only large pan angle and tilt angles but also with smooth and high speed. PLUTO 250 with zoom, focus, prism, color wheel, rotation gobo wheel, iris, can supply high-quality beam and gobos. PLUTO 250 is design for the cultural center, function hall, banquet hall, and rental performance market.

PRODUCT PARAMETERS

Optical system

Light source 250W module
Angle 3°-35°

Appearance

Size 358x250x609mm
Weight 19kg
Casing Flame-retardant plastic (V0)
Color Black

Electrical Specs

Voltage 100-240VAC, 50/60Hz
Max. Power 320W
Power Connection Power in and out
Signal socket 3pin and 5pin in and out

Control System

Pan/Tilt rotation 540°/270°(8-16bit)
Dimmer 0-100%16Bit
Cooling Forced Convection
Control DMX512, RDM, W-DMX (optional)

Display On board Control, Custom Mode, 0-25Hz Strobe
Con Personality STANDARD/18CHS, BASIC/15CHS
Special Pan/Tilt movement blackout, User-selectable pan/tilt ranges

Effect synthetic system

Rotating Gobo 8 Gobos+ White, Gobo-flow effect, Gobo shake, Bi-directional rotation
Static Gobo 12 Gobos+ White, Gobo-flow effect, Gobo shake
Colors Two color wheel (7dichroic-filters+White, Rainbow-flow effect).
Prism One piece of 5 F prism
Focus Motorized linear focus


Certification

CE, MET


Work Environment

Ambient Temp 0-45°C
IP Rated IP20

ILLUMINANCE AT DISTANCE

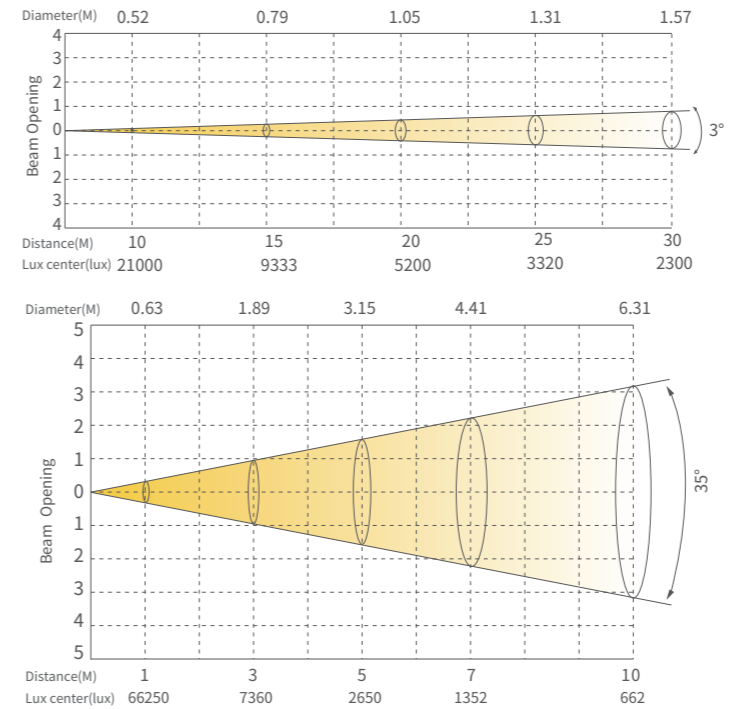

FIXED GOBO

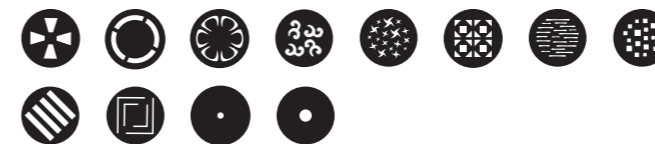


Color




Rotation Gobo



DIMENSIONS

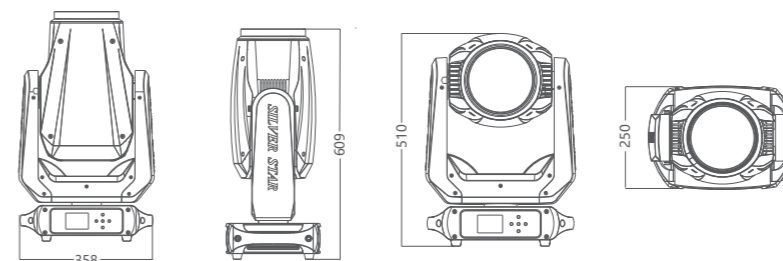

ACCESSORIES (Accessories not included unless otherwise stated)



Flight Case
(1320400184)