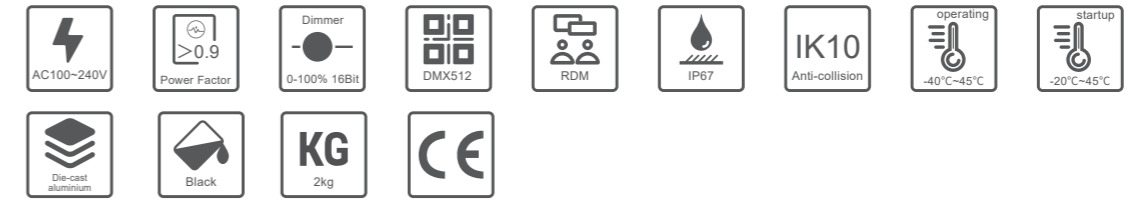# IN-GROUND LIGHT

TERRA i3 white
AP785SCT/SWT

Designed for in-ground or in-wall installations, the TERRA i3 white with customized optics in order to create the optimum in optical performance, delivering both excellent color mixing and high output. The TERRA 9/3 is engineered with internal driver and individual fixture addressing to achieve the dynamic lighting control. All-weather IP67 housing allows the TERRA 9/3 to be installed in a wide range of outdoor/indoor surface washing application.
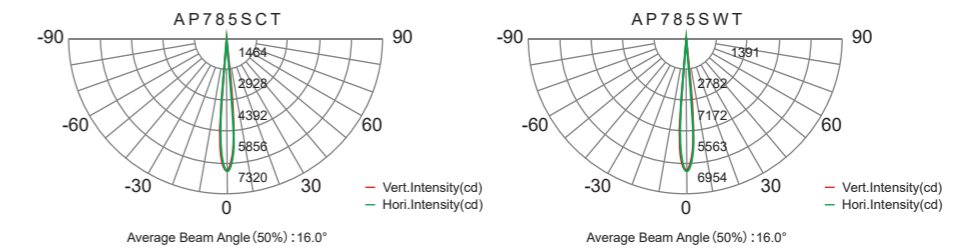
TECHNICAL DATA

PRODUCT	Max.Power	Lumen	Peak Intensity	LED Qty	Optics
TERRA i3 white					
AP785SCT	12W	774lm	7320cd (16°)	3pcs cool white	16°
AP785SWT	12W	735lm	6954cd (16°)	3pcs warm white	16°

SPECIFICATIONS

AC100~240V	≥0.9 Power Factor	Dimmer 0-100% 16Bit	DMX512	RDM	IP67	IK10 Anti-collision	operating -40℃~45℃	startup -20℃~45℃
Die-cast aluminium	Black	KG 2kg	CE					

PHOTOMATRIC DATA

AP785SCT/SWT

AP785SCT

-90 — 90
1464
2028
4392
5856
7320
-60 — 60
-30 — 30
0
— Vert.Intensity(cd)
— Hori.Intensity(cd)
Average Beam Angle (50%) : 16.0°

AP785SWT

-90 — 90
1391
2782
7172
5563
6954
-60 — 60
-30 — 30
0
— Vert.Intensity(cd)
— Hori.Intensity(cd)
Average Beam Angle (50%) : 16.0°

DIMENSIONS

177.2   175.2   Φ153   133   133