AUROLITE 80 COLOR IP
SS5421XWT

PRODUCT INTRODUCTION

It is a new waterproof foot light with uniform color mixing, soft light for large coverage. The software carries the unique CCS3.0 intelligent color management system ensures the consistency of light color. Built-in 1800-10000 K linear adjustment of CCT and 24 kinds of commonly used colors. It is ideal tool for indoor auxiliary surface lighting, foot lighting applications, outdoor cultural and tourism performances, event and shows.

PRODUCT PARAMETERS

Optic System

Light source	R*36PCS、G*36PCS、B*36PCS、W*36PCS
Angle	72°
TYP. CRI	95

Control

Dimmer	16Bit
Cooling	Direct convection
Protocol	RDM/DMX

Appearance

Size	551x163x133mm
Weight	7.5kg
Casing	Die-cast Aluminum
Color	Black

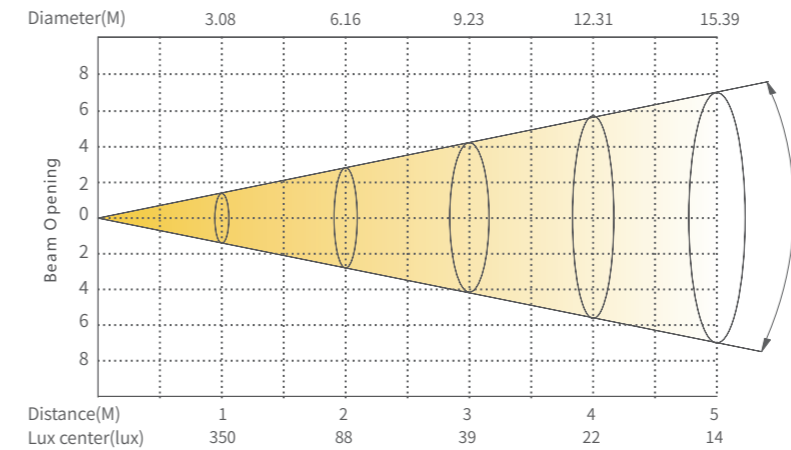|	
Display	On board Control, Custom Mode,0-25Hz Strobe
Personality	HSIC(7CH),SSP(7CH),TOUR(12CH),TR16(17CH),BLOCK1(9CH), BLOCK2(15CH),CMY（10CH)

Electrical

Voltage	AC100-240V
Power	70W
Power Connection	Power in/out
DMX XLR	DMX in/out

Certification

CE Certification

Working Environment

Ambient Temp	-20°C-45°C
IP Rated	IP66

ILLUMINANCE AT DISTANCE

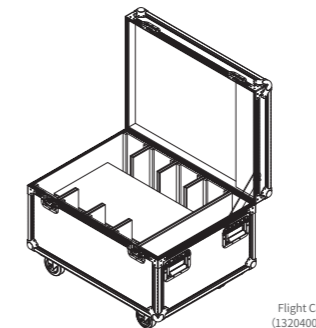| Diameter(M)	3.08	6.16	9.23	12.31	15.39
Distance(M)	1	2	3	4	5
Lux center(lux)	350	88	39	22	14

DIMENSIONS
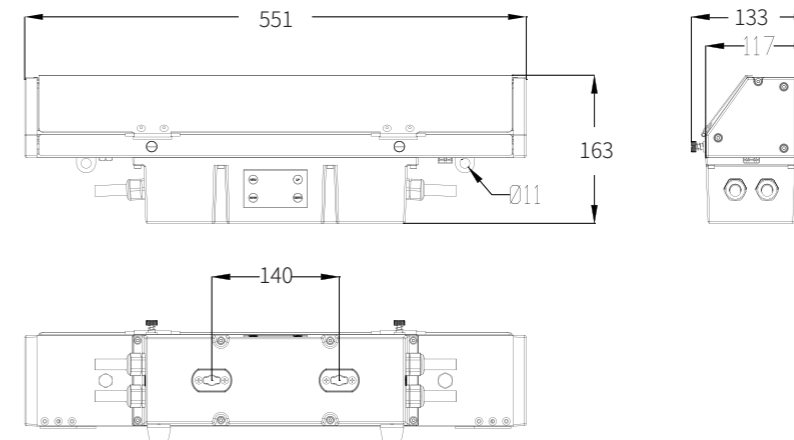
ACCESSORIES (Accessories not included unless otherwise stated)

Flight Case
(1320400258)