

T-ONE



PRODUCT INTRODUCTION

T-one is a typical parcan which has single-facet-light effect. It is adopting the trailblazing creative RGBL source, and has the stunning washing also the abundant color mixing effect. Besides, T-one is implanted with CCS technology, and the CRI is greater than 85Ra. T-one is perfect for the theatrical and TV, Studio applications.



PRODUCT PARAMETERS

Optical system

Light source 12pcs*15W RGBL
 Angle 16°, 25°/35° (可选)
 Illuminance 2200lx @5m, 16°

Appearance

Size 401x294x206mm
 Weight 5.5KG
 Casing Magnalium and Die-cast
 Color Black

Electrical Specs

Voltage 100-240VAC, 50/60Hz
 Max. Power 200W
 Power Connection Seetronic power input and output
 Signal socket DMX in and out, USB-C

Control System

Dimmer 0-100% 24 Bit
 Cooling Forced Convection
 Control DMX512, RDM, NFC

Display On board Control , Custom Mode , 0-25Hz Strobe
 Personality BASIC、SSP、TOUR、TR16、HSIC、CMY


Certification

CE, MET

Work Environment

Ambient Temp -20°C-45°C
 IP Rated IP66

DIMENSIONS

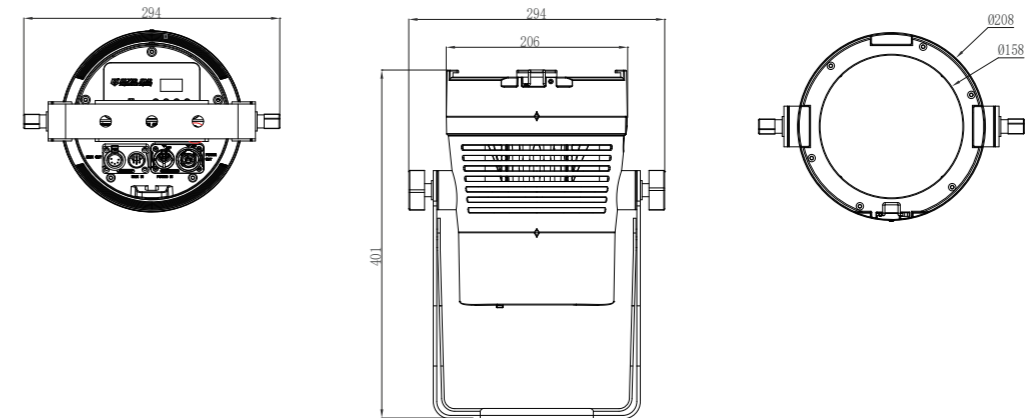

ACCESSORIES (Accessories not included unless otherwise stated)