**EP3**

PRODUCT INTRODUCTION

Eidolon Profile 250C PRO is an innovative water-proof lighting fixture with precise framing system, rich in multi-in-one color light type, uniform light mixing. The color is changeable. Color temperature is 2700k-8000k precise adjustable. It is equipped with high quality optical system, uniform spot and sharp imaging. With manual zoom, the focusing system is 20 ° to 40 ° and the angle positioning is accurate. The flexible and integrated framing system, cuts the light to frame some shapes to achieve the precise carving of the illuminated object. The framing belt is jammed, which can keep the framing shape unchanged for a long time. The dramatic dimming effect meets the strict demand of professional lighting. It contains rotating pattern disk, which can project abundant LOGO (The LOGO can be customized). Waterproof rate is IP65. This product
is designed for corrugated building, plaque, sculpture, live performance, cultural and tourism market, theme park and other places.

DIMENSIONAL DRAWING

812
286
343
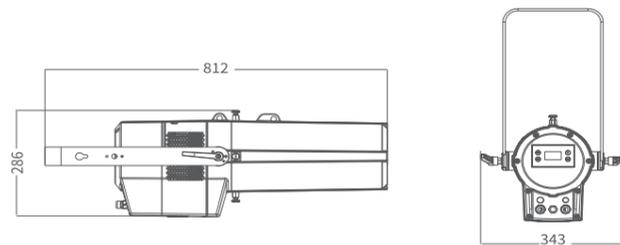
Eidolon Profile 250C PRO
AG1251XALT

Eidolon Profile 250C
AG1251XCET

TECHNICAL PARAMETER

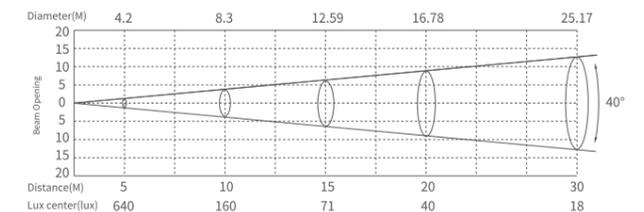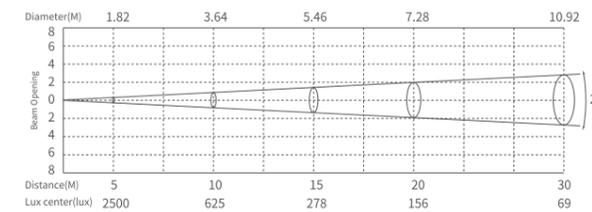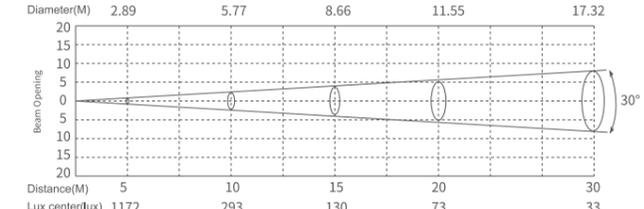| Max. Power	250W	250W
Light source	250W (RGBAL module)	250W (RGBW module)
Angle	20°-40°(Manual zoom)	15°-30°(Manual zoom)
Display	On board Control,0-25Hz Strobe	On board Control,0-25Hz Strobe
Channel	HISC(7CHS), SIMPLE(8CHS),COLOR MODE 8BIT(10CHS) COLOR MODE 16BIT(16CHS)	HISC(8CHS), SIMPLE(9CHS),COLOR MODE 8BIT(12CHS) COLOR MODE 16BIT(17CHS)
Rotating Gobo	1 Bi-directional rotation（optional）	1 Bi-directional rotation（optional）
Shutter	4 shutter blades with position and angle adjustment ; Can frame different shape and graphic effect.	4 shutter blades with position and angle adjustment ; Can frame different shape and graphic effect.
Focus	Portable manual zoom function	Motorized linear focus
Dimensions（L*W*H）	812x343x286mm	812x343x286mm

LIGHT SOURCE

RGBAL

SPECIFICATIONS

AC100~240V 50/60Hz | Dimmer 16Bit 0-100% | DMX512 | RDM | W-DMX (optional) | Direct Convection | IP65 | -20℃~45℃ | Die-cast aluminium | KG 16kg | CE

ILLUMINANCE AT DISTANCE

AG1251XALT

Diameter(M)	1.82	3.64	5.46	7.28	10.92	20°
Distance(M)	5	10	15	20	30
Lux center(lux)	2500	625	278	156	69

Diameter(M)	4.2	8.3	12.59	16.78	25.17	40°
Distance(M)	5	10	15	20	30
Lux center(lux)	640	160	71	40	18

AG1251XCET

Diameter(M)	1.34	2.68	4.02	5.36	8.04	15°
Distance(M)	5	10	15	20	30
Lux center(lux)	3584	896	398	224	100

Diameter(M)	2.89	5.77	8.66	11.55	17.32	30°
Distance(M)	5	10	15	20	30
Lux center(lux)	1172	293	130	73	33
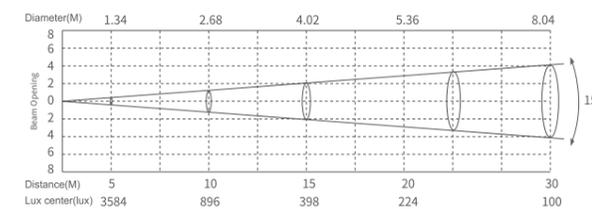
OPTIONAL ACCESSORIES

Color clip assembly (white) (2440010322)

Color clip assembly (black) (2440010321)

Color clip assembly (Grey) (2440010324)

Wireless antenna (1100000506)

Wireless receiving board (1130003260)

Gobo wheel kit (manual) (2440501462)

Gobo wheel kit (motorized) (2440501474)