

# EC3

## ECLIPSE MID COLOR 180

### SS5141XAL



#### PRODUCT INTRODUCTION

ECLIPSE MID COLOR 180 is a compact and lightweight 5 colors profile, with uniform color mixing, clear shaping. Equipped with intelligent color management system CCS3.0, to ensure the color consistency. Built-in 1800-10000K high CRI CCT and 48 frequently-used colors. Its Integrated structural design, holding the Shutter framing system, and manual zoom 25-50°. It is born for theaters,multi-functional hall, church, conference room, and TV stations etc.



#### PRODUCT PARAMETERS

##### Optical system

|              |                    |
|--------------|--------------------|
| Light source | 150W RGBAL         |
| CCT          | 1800K-10000K       |
| CRI Ra       | 93                 |
| Angle        | Manual Zoom 25-50° |

##### Appearance

|        |                              |
|--------|------------------------------|
| Size   | 568x224x191mm                |
| Weight | 6.1kg                        |
| Casing | Flame-retardant plastic (V0) |
| Color  | Black                        |

##### Electrical Specs

|                  |                         |
|------------------|-------------------------|
| Voltage          | AC100-240V,50/60Hz      |
| Rated Power      | 170W                    |
| Power Connection | power in and out        |
| DMX XLR          | 3pin or 5pin in and out |

##### Control System

|         |                   |
|---------|-------------------|
| Dimmer  | 0-100%16Bit       |
| Cooling | Forced Convection |
| Control | DMX/RDM           |

|                 |                                                                       |
|-----------------|-----------------------------------------------------------------------|
| Display         | On board Control, 0-25Hz Strobe                                       |
| Con Personality | BASIC (3CHS) 、SSP(7CHS)、TOUR(12CHS)、TR16(18CHS)、HSIC(7CHS)、CMY(10CHS) |
| Framing system  | 4 blades, manual shutter                                              |


##### Certification

CE、MET


##### Work Environment

|              |        |
|--------------|--------|
| Ambient Temp | 0-45°C |
| IP Rated     | IP20   |


#### ILLUMINANCE AT DISTANCE

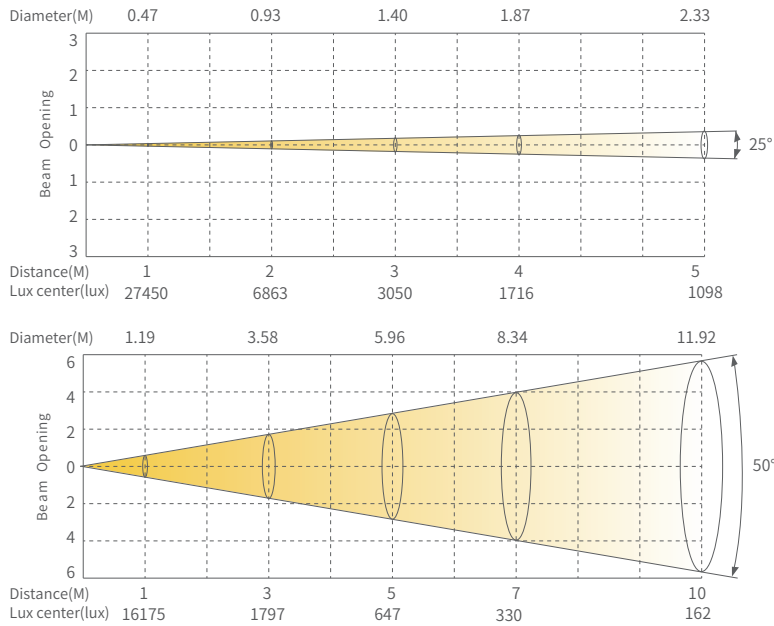

#### DIMENSIONS

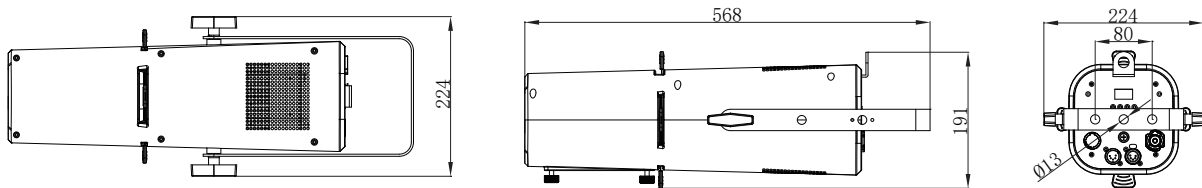

#### ACCESSORIES (Accessories not included unless otherwise stated)

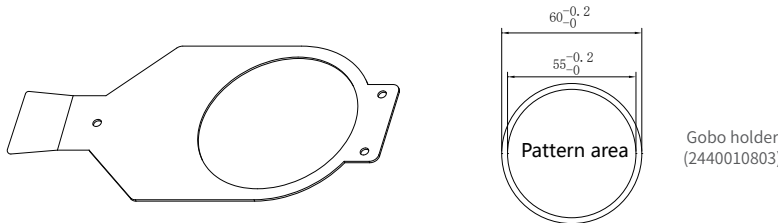

STAGER

FULL COLOR