

# EC5

## ECLIPSE PRIME HEX

### SS5151XH



#### PRODUCT INTRODUCTION

ECLIPSE PRIME HEX is a outstanding RGBALC 6 color profile, covering full color range. It is compated with CCS technology, precised CCT from 1800-10000K, reaching super high CRI ≥ 90. ECLIPSE PRIME HEX also has the perfect dimming curve and crystal-clear projection. It's designed for theater, opera, TV, rental and show applications!



#### PRODUCT PARAMETERS

##### Optical system

|                        |                                            |
|------------------------|--------------------------------------------|
| Light source           | 270W RGBALC                                |
| Luminous flux          | 10276lm                                    |
| CCT                    | 1800K-10000K                               |
| Angle                  | 5°/10°/14°/19°/26°/36°/50°/15°-30°/25°-50° |
| CRI Ra/CRI R9/CQS/TLCI | 95/90/95/80                                |

##### Control System

|         |                   |
|---------|-------------------|
| Dimmer  | 0-100%16Bit       |
| Cooling | Forced Convection |
| Control | DMX512, RDM       |

##### Certification

CE, MET

##### Work Environment

|              |        |
|--------------|--------|
| Ambient Temp | 0-45°C |
| IP Rated     | IP20   |

##### Appearance


|        |                   |
|--------|-------------------|
| Size   | 578x371x226mm     |
| Weight | 8kg               |
| Casing | Die-cast aluminum |
| Color  | Black             |

##### Electrical Specs


|                  |                         |
|------------------|-------------------------|
| Voltage          | AC100-240V,50/60Hz      |
| Rated Power      | 280W                    |
| Power Connection | power in and out        |
| DMX XLR          | 3pin or 5pin in and out |

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| Display         | On board Control, 0-25Hz Strobe                                   |
| Con Personality | BASIC(3CH),SSP(8CH),TOUR(13CH),TR16(20CH),<br>HSIC(7CH),CMY(10CH) |


#### ILLUMINANCE AT DISTANCE

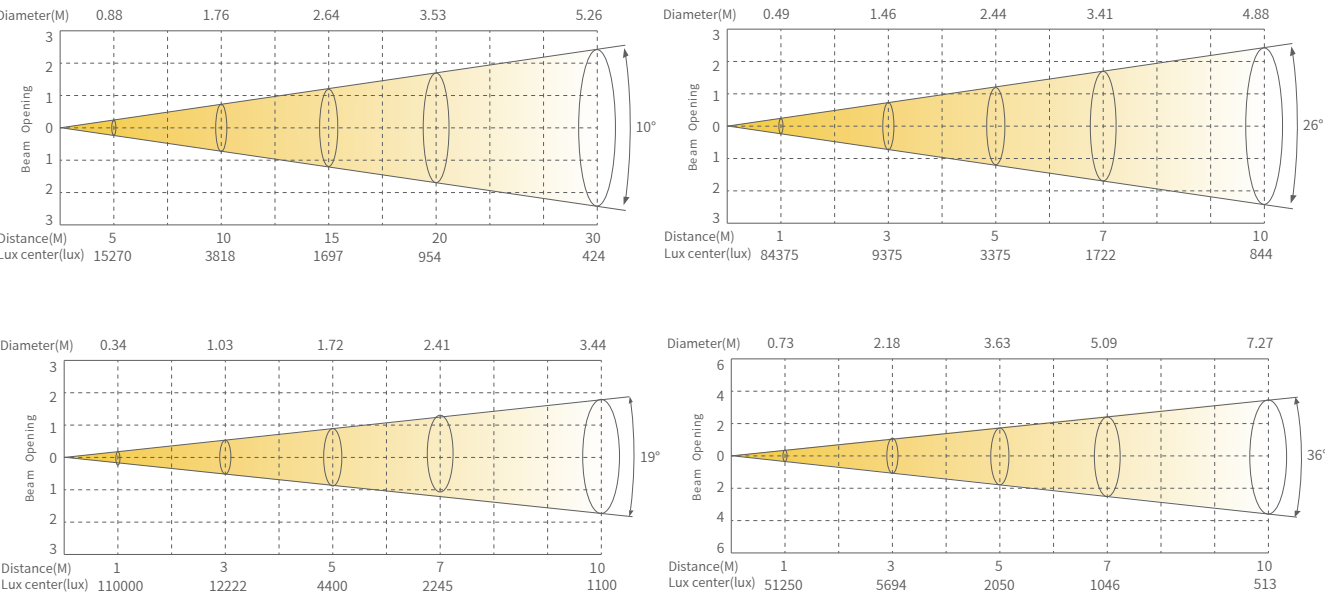

#### DIMENSIONS

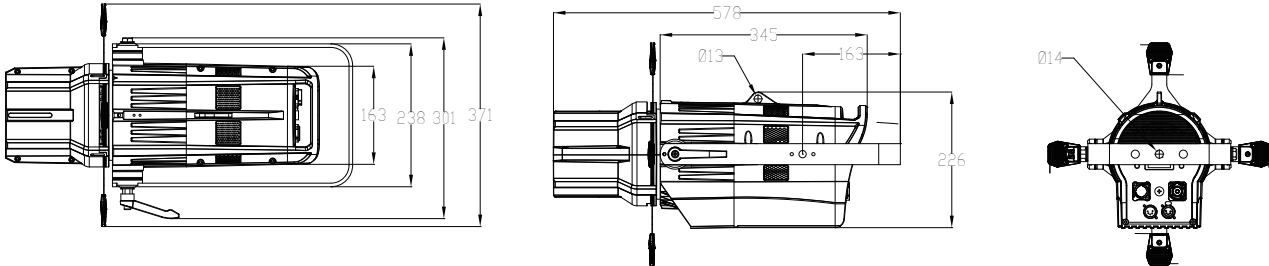

#### ACCESSORIES(Accessories not included unless otherwise stated)

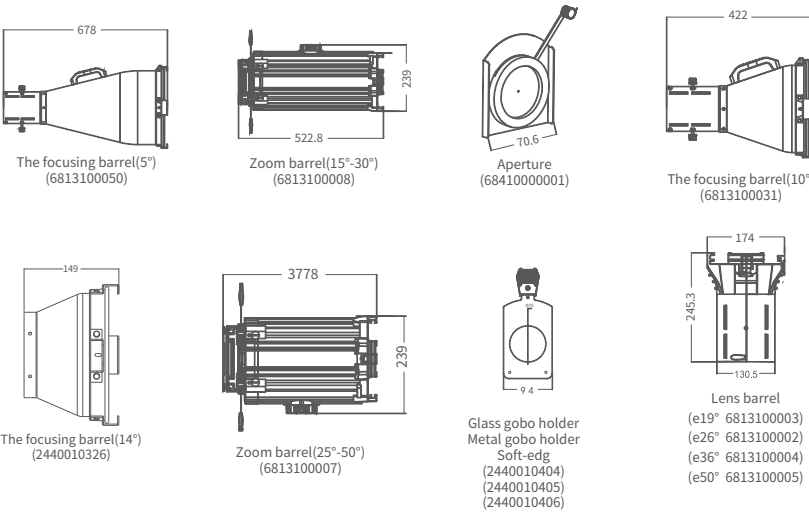

STAGER

FULL SPECTRUM