


S-one

SS5481XH



PRODUCT INTRODUCTION

Leading technology, S-one Skylight. Innovative 6-color optical technology, combined with HSIC color mixing system, making colors switch fast and uniform. 1800-10000K color temperature adjustable, CRI>95Ra, restore true color, create theater-level visual effects. Fast pan and tilt movement and precise framing system, achieve accurate moving direction and spot size, and enhance stage interactive experience. It is the perfect choice for large and medium-sized theaters and rental performances.

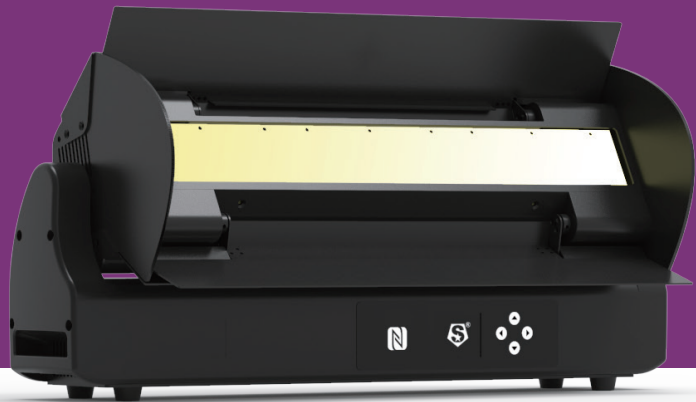

PRODUCT PARAMETERS

Optical system

Light source	600W RGBALC
angle	15°X80° (1m@12,860lux)
Luminous flux	18026lm
CRI Ra	95
CTO	1800k-10000k

Control System

Dimmer	0-100% 24Bit
Cooling	Direct Convection
Control	RDM/DMX/NFC

Certification

CE

Appearance

Size	624*147*330mm
Weight	13.7kg
Casing	Aluminum + plastic
Color	Black

Electrical Specs


Voltage	AC100-240V
Max. Power	635W
Power Connection	Power input/output
Signal connection	3 pin and 5pin in and out

Functional effect	Display board control static, custom mode, 0-25Hz stroboscopic
Con Personality	HSIC(14CH)、SSP(11CH)、TOUR(20CH)、TR16(28CH)、CMY(16CH)
Light mask	electrically adjust

Work Environment

Ambient Temp	0°C-45°C
IP Rated	IP20

ILLUMINANCE AT DISTANNXE

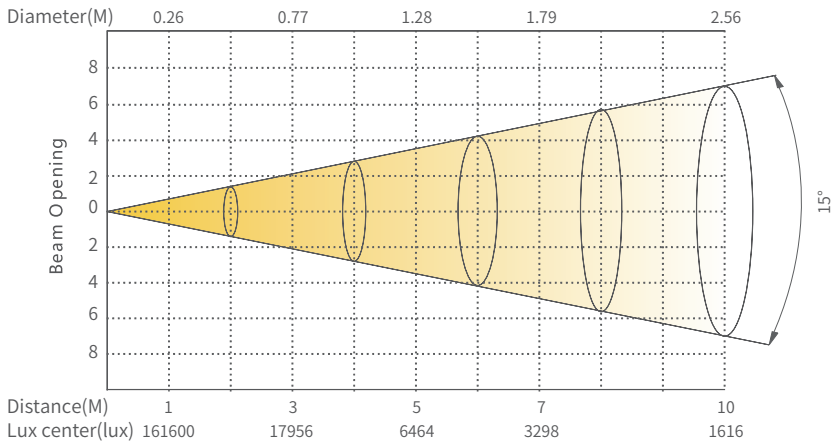

DIMENSIONS

