


## PRODUCT INTRODUCTION



Graze series is a linear flood light, designed to illuminate walls or any type of linear structure, integrated universal power supply and connect via the power and data box, thanks to the seamless connection and can have a good uniform color effect.  
Applied to indoor and outdoor installation, such as shopping mall, hotel, church, bridge, etc.

## DIMENSIONAL DRAWING

Dimensions (L\*W\*H) 354.3x65.9x60.7mm

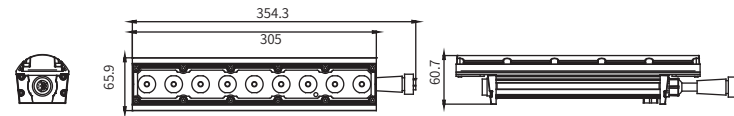

## TECHNICAL PARAMETER

PRODUCTNAME	PRODUCT	MAX.POWER	LUMEN	PEAK INTENSITY	LED QTY	OPTICS
GRAZE 9Q	AM711 XCET	20W	863lm	6100cd (15°)	Multiple color (RGLB, RGBW)	LENS OPTICS : 15° AFTER DIFFUSER : 25°, 30°, 60°, 10°*60°, 15°*30°, 15°*40°, 30°*15°, 30°*60°, 40°*15°, 60°*10°, 60°*30°
GRAZE 9Q	AM711 XLET	20W	733lm	5350cd (15°)	Multiple color (RGLB, RGBW)	
GRAZE i101	AM711 SCT	20W	1050lm	7300cd (15°)	Dynamic White (AC, CW, C, W, N)	
GRAZE i101	AM711 SWT	20W	930lm	6700cd (15°)	Dynamic White (AC, CW, C, W, N)	

## CHANNEL MODE

Multiple Color and DMX channel mode: SOLID, ARC2, ARC2+D, ARC FULL, SPECIAL2.

Dynamic White and DMX channel mode: SOLID, ON/OFF.

Optional dual color temperature DMX channel mode: VW, VW+D.

## COLOR CONSISTENCY SYSTEM

### Color Temperature Segment



### 24 Color Card




## SPECIFICATIONS




## PHOTOMETRIC DATA


GRAZE 9Q  
AM711XCET

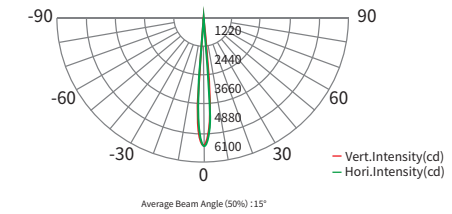


GRAZE 9Q  
AM711XLET

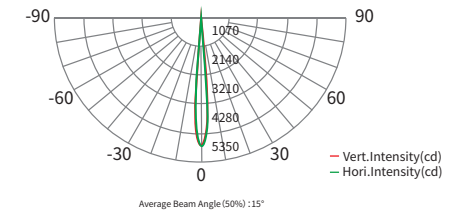

GRAZE i101  
AM711SCT

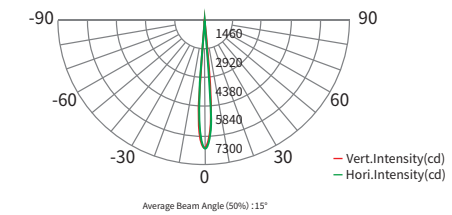

GRAZE i101  
AM711SWT

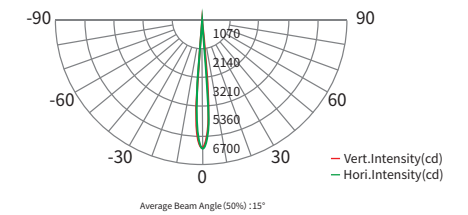

## NECESSARILY ACCESSORIES



Data & Power Box  
(AM710)

End Termination Cap (female)  
(1180000657)

## OPTIONAL ACCESSORIES

Glare Shield 9Q  
(6813100052)

	20° Thin filter (2220000539)	30° Thin filter (2220000144)
	40° Thin filter (2220000145)	60° Thin filter (2220000198)
8-core extension line (0.5 meters) (1170000878)	1*30° Thin filter (2220000139)	1*40° Thin filter (2220000583)
8-core extension line (1.5 meters) (1170000877)	1*60° Thin filter (2220000266)	30*1° Thin filter (2220000217)
8-core extension line (3 meters) (1170000876)	30*60° Thin filter (2220000259)	60*30° Thin filter (2220000142)
8-core extension line (5 meters) (1170000875)	40*1° Thin filter (2220000229)	