

EH6

ECLIPSE PRIME HEX



PRODUCT INTRODUCTION

ECLIPSE PRIME HEX is an outstanding RGBALC 6 color profile, covering full color range. It is equipped with CCS technology, precise CCT from 1800-10000K, reaching super high CRI ≥ 90 . ECLIPSE PRIME HEX also has the perfect dimming curve and crystal-clear projection. It's designed for theater, opera, TV, rental and show applications!

PRODUCT PARAMETERS

Optical system

| | | | |
|--------------|--|--------|----|
| Light source | 270W RGBALC | | |
| CCT | 1800K-10000K | | |
| Angle | 5°/10°/14°/19°/26°/36°/50°/15°-30°/25°-50° | | |
| CRI Ra | 95 | CRI R9 | 90 |
| CQS | 95 | TLCI | 80 |

Control System

| | |
|---------|-------------------|
| Dimmer | 0-100%16Bit |
| Cooling | Forced Convection |
| Control | DMX512, RDM |

Certification

CE, MET

Appearance

| | |
|--------|-------------------|
| Size | 578x371x226mm |
| Weight | 8kg |
| Casing | Die-cast aluminum |
| | Black |

Electrical Specs


| | |
|------------------|-------------------------|
| Voltage | AC100-240V,50/60Hz |
| Rated Power | 280W |
| Power Connection | power in and out |
| DMX XLR | 3pin or 5pin in and out |

| | |
|-----------------|---|
| Display | On board Control, 0-25Hz Strobe |
| Con Personality | BASIC(3CH),SSP(8CH),TOUR(13CH),TR16(20CH),HSIC(7CH),CMY(10CH) |


Work Environment

| | |
|--------------|--------|
| Ambient Temp | 0-45°C |
| IP Rated | IP20 |

ILLUMINANCE AT DISTANCE

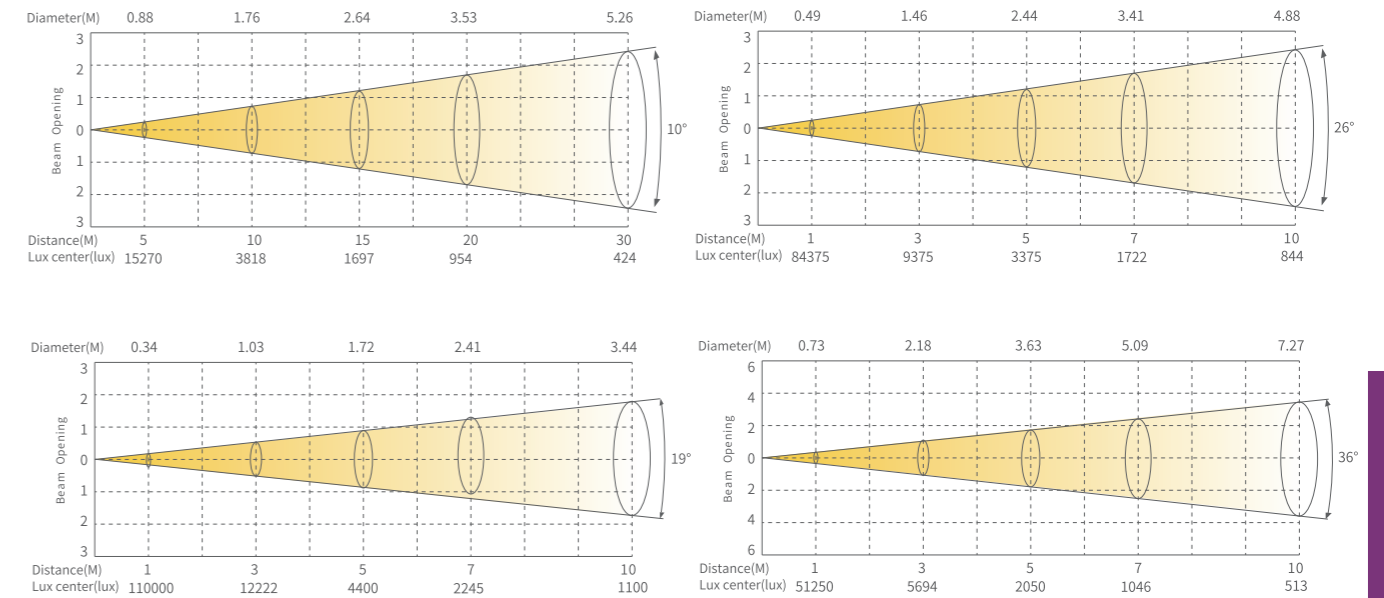

DIMENSIONS

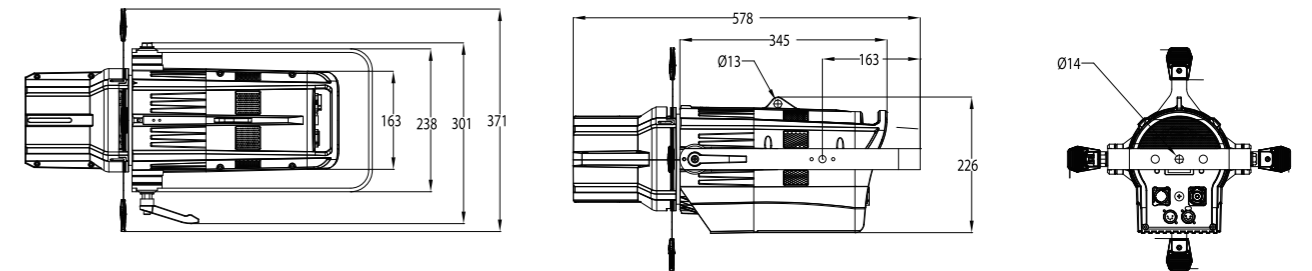

ACCESSORIES(Accessories not included unless otherwise stated)

