

# S1

## ULTI CYC



### PRODUCT INTRODUCTION

The 1st professional LED cyclorama apply with 7 special selected- colors, truly- presents the full color spectrum. Using the asymmetric optics and advanced HSIC color management system, mixing colors in an ultra-fast and easy way. You can select high quality white colors from 2700k- 8000k, with high CRI >90; Perfect for all kinds of large and medium theatre, studio, also the rental events.



### PRODUCT PARAMETERS

#### Optical system

Light source 48xRed, 32xGreen, 24xBlue, 16xDeep Blue, 16xCyan,40xLime, 24xAmber  
 CCT 1800K-10000K  
 CRI Ra≥90  
 Angle 45°x65°

#### Appearance

Size 622x310x327mm  
 Weight 15kg  
 Casing Extruded aluminum  
 Color Black

#### Electrical Specs

Voltage 100-240VAC,50/60Hz  
 Rated Power 340W  
 Power Connection Power in and out  
 DMX XLR DMX in and out

#### Control System

Dimmer 0-100%16Bit  
 Cooling Direct Convection  
 Control DMX512, RDM

Display On board Control,0-25Hz Strobe, Custom Mode  
 Con Personality HSIC(7CHS), SSP(10CHS) , TOUR(14CHS) , TR16(22CHS) , PIXEL.1(9CHS), PIXEL.2(17CHS)


#### Certification

CE, MET


#### Work Environment

Ambient Temp 0-45°C  
 IP Rated IP20

### ILLUMINANCE AT DISTANCE

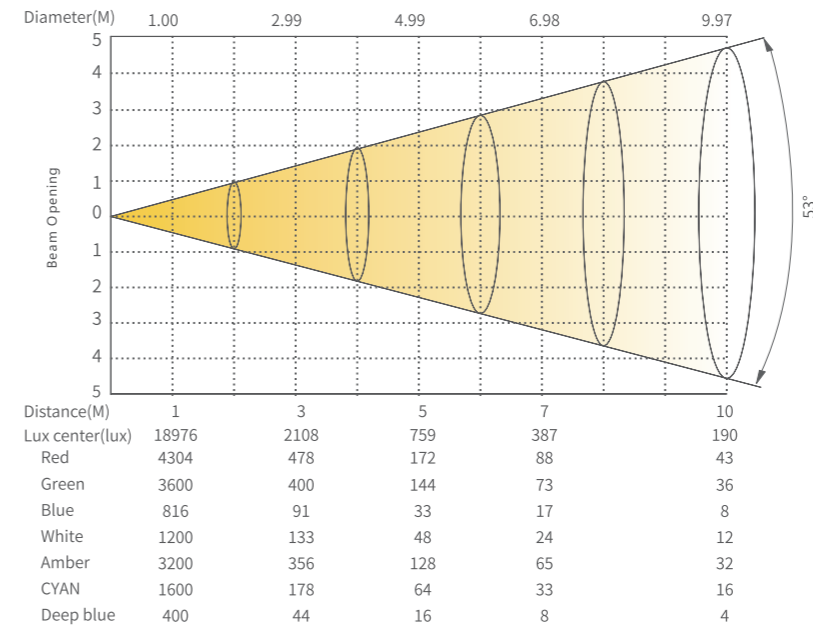

### DIMENSIONS

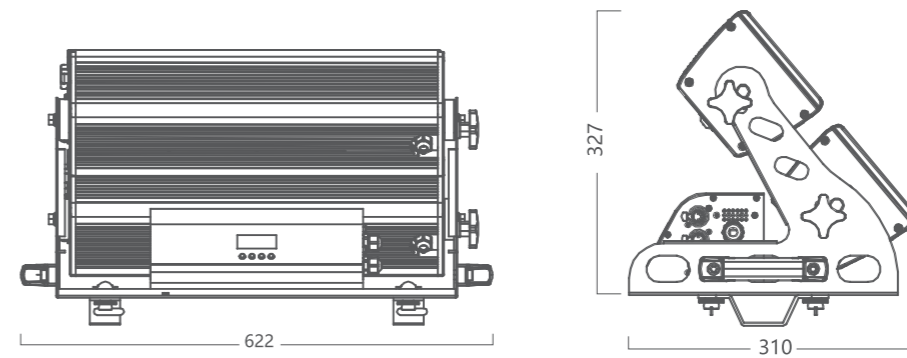

### ACCESSORIES (Accessories not included unless otherwise stated)

